


SANIBOXER-02

AIR-OPERATED DOUBLE DIAPHRAGM PUMPS



DEBEM
HYGIENIC SOLUTIONS

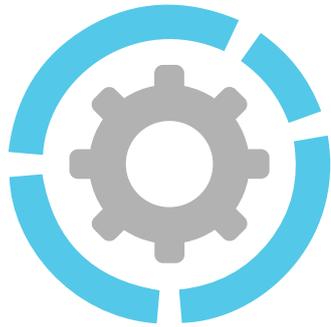

Suction/delivery connections	BS 4825 1" 1/2 Clamp
Air fitting	3/8" f BSPP
Max flow rate*	160 l/min
Max air supply pressure	8 bar
Max head*	80 m
Max suction from negative head - dry running*	2,5 m
Max suction from negative head - with pump on	9,5 m
Max diameter of suspended solids	7 mm

* The value depends on the pump configuration.



CE




- Product designed and built in Italy
- PATENTED anti-stall pneumatic circuit
- Operates with NON-lubricated air
- SELF-PRIMING
- It supports dry running
- Possibility of adjusting the operating speed
- Versatility of use
- Suitable for handling fluids with high viscosity and for heavy applications
- Possibility of handling fluids with suspended solids
- Suitable for continuous service

SANIBOXER-02

AIR-OPERATED DOUBLE DIAPHRAGM PUMPS



Specifications and types

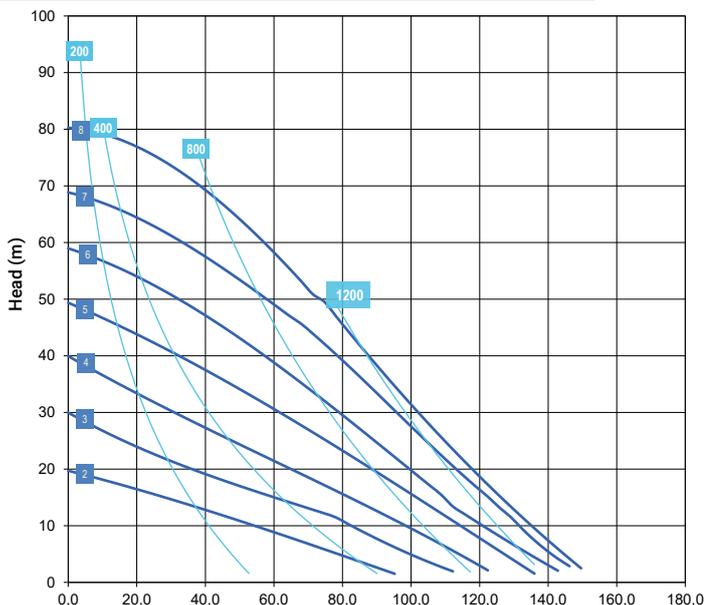

* The curves and performances refer to pumps with submerged suction and free delivery outlet, with water at 20°C and vary according to the composition materials.

Flow rate (l/min)

Air supply pressure (bar)

Air consumption (NI/min)



Optical sensors to detect diaphragm rupture

In case of rupture, the sensors warn the operator and automatically stop pump operation via a solenoid valve.



AISI 316 L

SANIBOXER-02

Maximum Dimensions

Height	714 mm
Width	436 mm
Depth	370 mm

Construction materials (casing and manifolds) and net weight

AISI 316 L*	22 Kg
	Temp. 3°C min.
	95°C max

*Mechanically polished - surface finish <math><0.8 \mu\text{m}</math>

