Low Headroom

TCR-LHR Serie
500, 1.000 & 2.000 kg




WLL (kg)	500 - 2000
Lifting speed full load (m/min)	3 - 10,5
Lowering speed full load (m/min)	5,2 - 17,9
Lifting speed w/o load (m/min)	5,7 - 16
Travel speed (m/min)	9
Chain falls	1 - 2
Hoist air consumption (l/sec)	25
Trolley air consumption (l/sec)	25
Air connection	1/2" PT
Weight with 3 m lift (kg)	85 - 105
Additional weight per metre of lift (kg)	0,8 - 2,2
Flange range (mm)	60 - 300
Trolley	+
4 Button Pendant Control with emergency stop (VTP4E)	+

EPUTEC Drucklufttechnik GmbH | Haidenbucherstraße 1 | 86916 Kaufering
Telefon +49 (0)8191 915119 0 | Telefax +49 (0)8191 915119 19 | E-Mail: info@eputec.de | Web: www.eputec.de

Low Headroom

TCR-LHR Serie 500, 1.000 & 2.000 kg

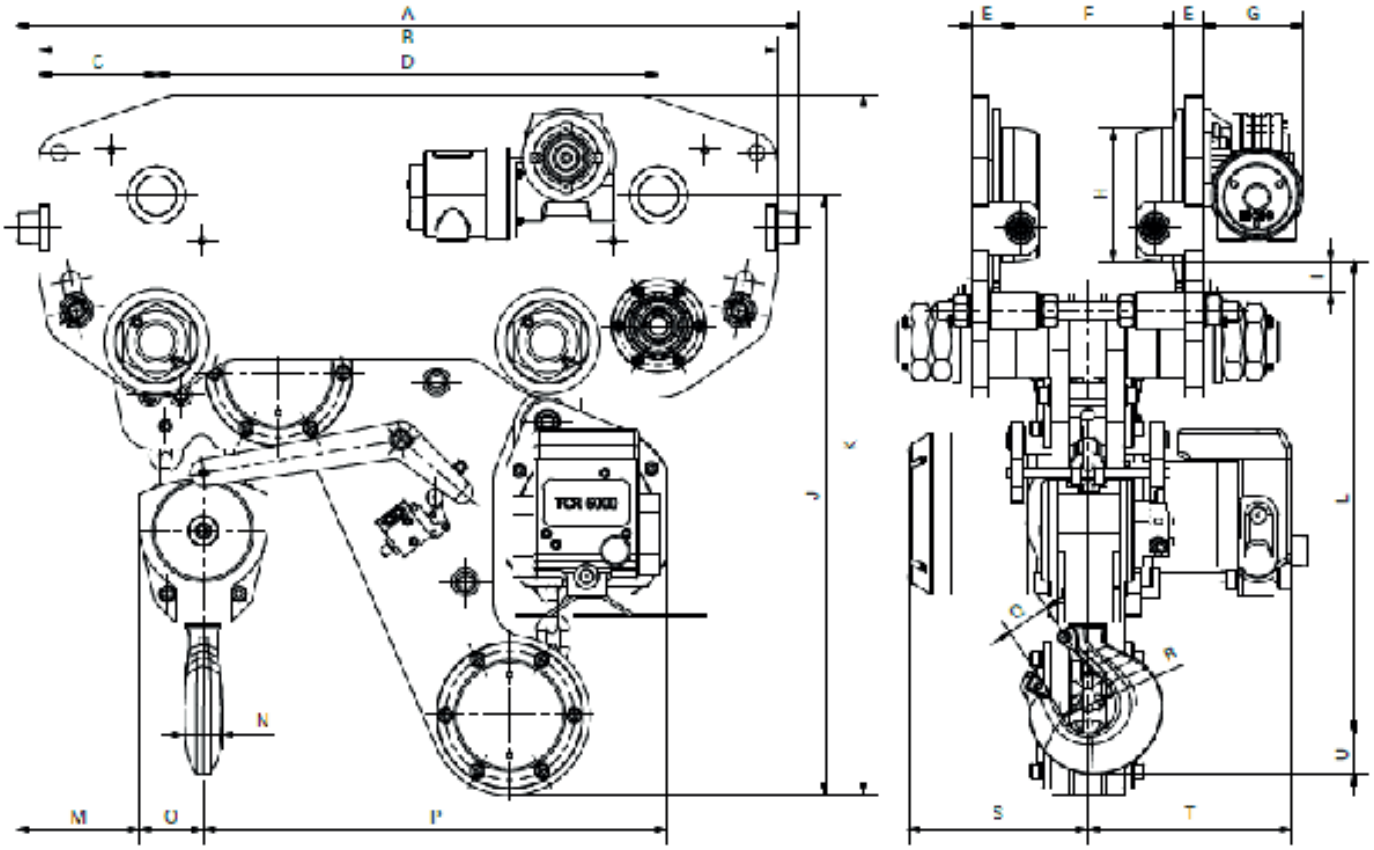

Typ	A	B	C	D	E	F	G	H	I	J	K
TCR-500-LHR TCR-1000/2-LHR TCR-1000-LHR TCR-2000-LHR	570	520	115	340	21	60~300	135	Ø70	30	480	590

Typ	L	M	N	O	P	Q	R	S	T	U	-
TCR-500-LHR	340	180	25	20	295	30	Ø40	186	156	30	
TCR-1000/2-LHR	375	135	25	42	341	30	Ø40	186	156	30	
TCR-1000-LHR	340	177	25	23	296	29	Ø40	177	157	30	
TCR-2000-LHR	390	124	30	52	320	28	Ø40	177	157	30	

All measurements are in mm / Information subject to change without notice.

EPUTEC Drucklufttechnik GmbH | Haidenbucherstraße 1 | 86916 Kaufering
Telefon +49 (0)8191 915119 0 | Telefax +49 (0)8191 915119 19 | E-Mail: info@eputec.de | Web: www.eputec.de